


# Technical data sheet

## Screw plug, PG thread

Item number: 2090163

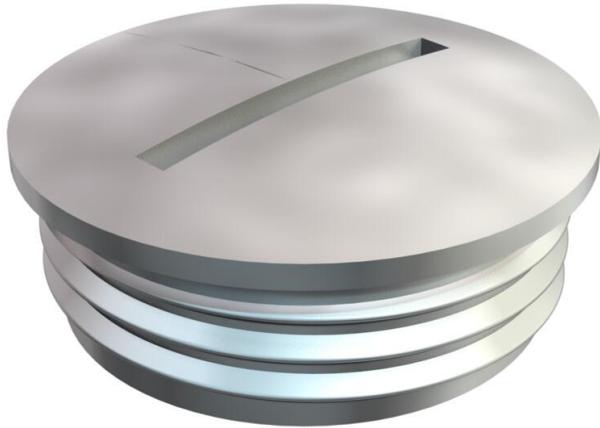

Screw plug N in accordance with DIN 46320, with PG thread to DIN 40430.

In conjunction with sealing ring, types 107, 170 or 171, protection rating IP68 (5 bar/1 hr).

Sealing ring not contained in the scope of delivery.

\* Prices according to DEL notation.



**CuZn**  
37 Brass

**N** Nickel-plated

### Master data

Item number	2090163
Type	168 MS PG16
Description 1	Screw plug
Manufacturer	OBO
Dimension	PG16
Material	Brass
Surface	Nickel-plated
Surface standard	
Smallest sales unit	100
Unit of quantity	Piece
Weight	1.3 kg
Weight unit	kg/100 pc.
CO Footprint (GWP) Cradle-to-Gate	0,0327 kg COe / 1 Piece


# Technical data sheet

Screw plug, PG thread

Item number: 2090163



## Dimensions

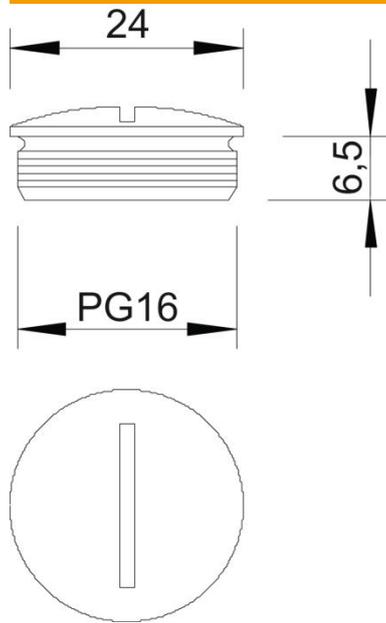

Dimension D	24 mm
Dimension L	6.5 mm

## Technical data

explosion-proof	no
For Ex zone gas	Without
For Ex zone dust	Without
Thread	Pg 16
Thread type	PG
Nominal thread size metric/PG	16
Thread increase	1.41 mm
Fibre-glass reinforced	no
Halogen-free	yes
Impact-resistant	no
Protection rating	IP68