


# Technical data sheet

## Vario quick connector Rd 6-8 / Rd 6-8 mm Cu

Item number: 5311407



- For T, cross-over and parallel connections with adapter plates
- Quick mounting using an M10 x 30 bolt, made from rustproof stainless steel (A2)
- With sprung washer to DIN 137
- Corresponds to the requirements of VDE 0185-305 (IEC 62305)

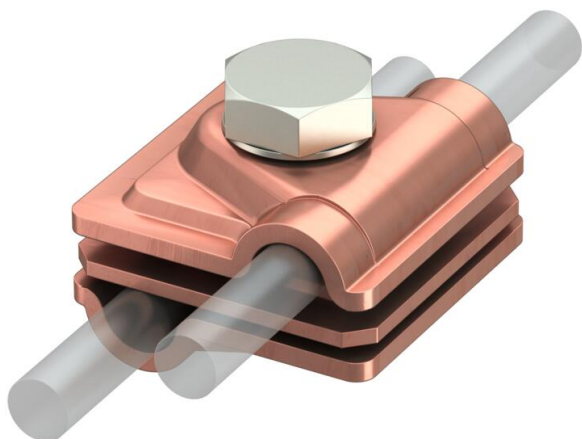

**Cu** Copper

### Master data

|                     |                 |
|---------------------|-----------------|
| Item number         | 5311407         |
| Description 1       | Quick connector |
| Description 2       | Vario           |
| Manufacturer        | OBO             |
| Dimension           | 40x40mm         |
| Material            | Copper          |
| Smallest sales unit | 10              |
| Unit of quantity    | Piece           |
| Weight              | 12.71 kg        |
| Weight unit         | kg/100 pc.      |


# Technical data sheet

Vario quick connector Rd 6-8 / Rd 6-8 mm Cu


Item number: 5311407



## Dimensions



|             |       |
|-------------|-------|
| Dimension A | 40 mm |
|-------------|-------|

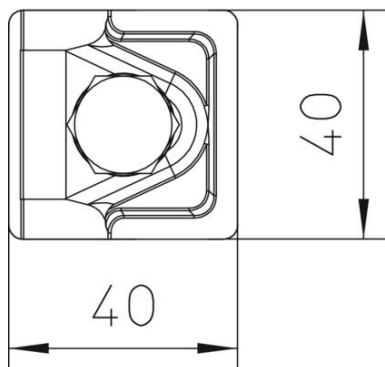

## Technical data

|                                     |                                 |
|-------------------------------------|---------------------------------|
| Type of fastening screw             | Hexagonal bolt                  |
| Type of connector                   | Multipurpose connection clamp   |
| Lightning current carrying capacity | H/100 kA                        |
| Suitable for connection             | Round conductor Rd 6-8 / Rd 6-8 |
| Fit                                 | RD 6-8 / 6-8 mm                 |
| Intermediate plate                  | no                              |