

Technical data sheet

Set of Quick clips and Quick pipe pipes

Item number: 2154536



Set consisting of Quick pipe electrical installation pipes and Quick clip surface-mounted clips. For surface-mounted routing of cables in interiors and protected outdoor areas. Universal fastening on wall and ceiling. Comprises 30 m of pipe each of 2 metres in length and 96 Quick clips. Can be used in a temperature range of -25 to +60 °C.



PVC Polyvinylchloride

Master data

| | |
|-----------------------------------|-----------------------------|
| Item number | 2154536 |
| Type | 2954 M25 LGR |
| Description 1 | Quick-Pipe set |
| Description 2 | Quick trunking + Quick clip |
| Manufacturer | OBO |
| Dimension | M25 |
| Colour | Light grey; RAL 7035 |
| Material | Polyvinylchloride |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 517 kg |
| Weight unit | kg/100 pc. |
| CO Footprint (GWP) Cradle-to-Gate | 9,0821 kg COe / 1 Piece |


Technical data sheet

Set of Quick clips and Quick pipe pipes

Item number: 2154536



Dimensions

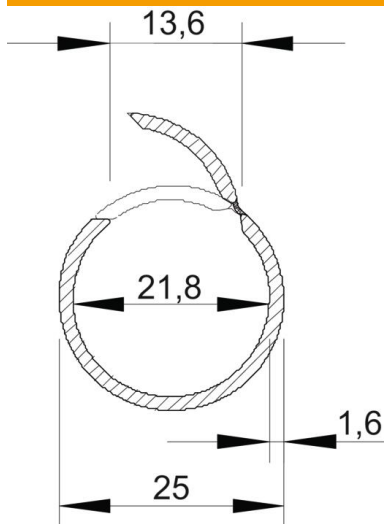

| | |
|------------------|---------|
| Dimension C | 13,6 mm |
| Dimension D | 25 mm |
| Dimension m (mm) | 21,8 |
| Dimension t | 1.6 mm |

Technical data

| | |
|-----------------------------------|--------|
| Surface-mounted | yes |
| Flame-resistant version | no |
| Concrete installation | yes |
| Size | M25 |
| Halogen-free | no |
| Installation on wood | yes |
| Installation in the earth | no |
| Installation outdoors | no |
| Classification code | 0 |
| Machines and system installation | yes |
| With sleeve | no |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -25 °C |
| Underfloor installation (screed) | no |
| Concealed | no |