

# Technical data sheet

## CML3518 profile rail, slot 17 mm, FT, perforated

Item number: 1104562



Central C profile rail for cable routing, in conjunction with clamp clips with a hammerhead foot. Can also be used as suspension construction for cable support systems.




**St** Steel

**FT** Hot-dip galvanised

### Master data

Item number	1104562
Type	CML3518P0700FT
Description 1	Profile rail
Description 2	perforated, slot 17mm
Manufacturer	OBO
Dimension	700x35x18
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	10
Unit of quantity	Piece
Weight	53.4 kg
Weight unit	kg/100 pc.

### Dimensions

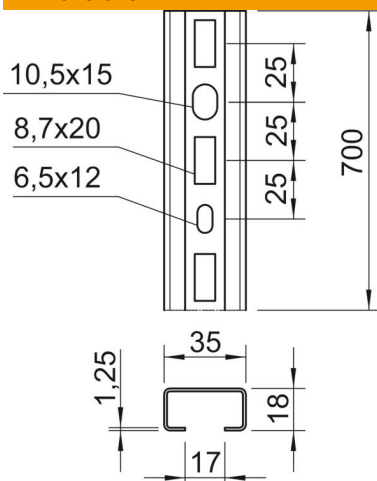

Length	700 mm
Width	35 mm
Height	18 mm
Dimension L	700 mm

# Technical data sheet

CML3518 profile rail, slot 17 mm, FT, perforated

Item number: 1104562



## Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Maintain electrical functions	no
Material thickness	1.25 mm
With perforation	yes
With tothing	no
Profile shape	C profile
Slot width	17 mm
Static value A	0.88 cm <sup>2</sup>
Static value Iy	0.41 cm
Static value Iz	1.81 cm
Static value Wy	0.41 cm <sup>2</sup>
Static value Wz	1.03 cm <sup>2</sup>