

Technical data sheet

Base, MultiBase with remote signalling

Item number: 5096682




- Suitable for V 25-B+C, V 20-C and V10-C
- Pre-mounted and ready for connection
- Multifunction terminals for easy connection to series-mounted devices
- Upper parts can be rotated through 180 degrees
- With remote signalling, potential-free NO contact, for function monitoring

Master data

|                                    |                         |
|------------------------------------|-------------------------|
| Item number                        | 5096682                 |
| Type                               | MB 4+FS                 |
| Description 1                      | MultiBase               |
| Description 2                      | 4-pole + RS             |
| Manufacturer                       | OBO                     |
| Dimension                          | 4-polig+FS              |
| Smallest sales unit                | 1                       |
| Unit of quantity                   | Piece                   |
| Weight                             | 21 kg                   |
| Weight unit                        | kg/100 pc.              |
| CO2 Footprint (GWP) Cradle-to-Gate | 1,198 kg CO2e / 1 Piece |

Dimensions

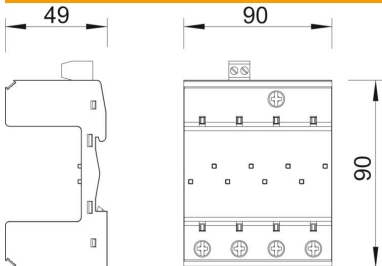

# Technical data sheet

## Base, MultiBase with remote signalling

Item number: 5096682



### Technical data

|                                                                 |                     |
|-----------------------------------------------------------------|---------------------|
| Version for                                                     | 4-pole              |
| Pole version                                                    | 4                   |
| Structural width in division units<br>(division unit, 17.5 mm)  | 4                   |
| Operating temperature, max.                                     | 80 °C               |
| Operating temperature, min.                                     | -40 °C              |
| Remote signalling                                               | yes                 |
| Conductor cross-section, rigid<br>(single-wire/multiwire), max. | 35 mm <sup>2</sup>  |
| Conductor cross-section, rigid<br>(single-wire/multiwire), min. | 2.5 mm <sup>2</sup> |
| Installation type                                               | DIN rail 35 mm      |
| Network form                                                    | Other               |
| Protection rating                                               | IP20                |
| Permitted temperature range,<br>max.                            | 80 °C               |
| Permitted temperature range,<br>min.                            | -40 °C              |