

Technical data sheet

Combination arrester, 1-pole



Item number: 5096849



Combination arrester, type 1+2, for use in TN and TT networks

- Lightning protection equipotential bonding to VDE 0185-305 (IEC 62305)
- Lightning current arresting capacity to 50 kA (10/350) per pole and up to 150 kA (10/350) in total
- Protection level < 1.7 kV allows device protection
- Short-circuit resistance 10 kA, arrester backup fuse to 500 A gL/gG
- Encapsulated, non-extinguishing spark gaps


Application: Industrial systems and buildings with external lightning protection of the highest class I to IV.



Master data

Item number	5096849
Type	MCD 50-B
Description 1	Coordinated Lightning Controller
Manufacturer	OBO
Dimension	255V
Smallest sales unit	1
Unit of quantity	Piece
Weight	34.4 kg
Weight unit	kg/100 pc.

Dimensions

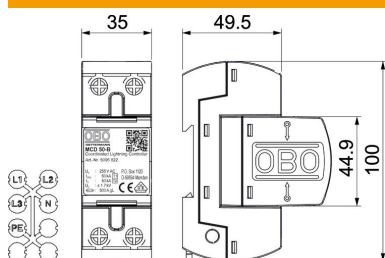

Length	100 mm
Width	35 mm
Height	69 mm


Technical data sheet

Combination arrester, 1-pole

Item number: 5096849



Technical data

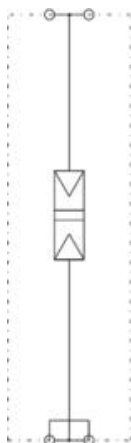

Arrester surge current (8/20 μ s) [total]	50 kA
Response time	<100 ns
Blow-out	no
Version for	1-pole complete; 255 V
Pole version	1
Structural width in division units (division unit, 17.5 mm)	2
Operating temperature, max.	85 °C
Operating temperature, min.	-40 °C
Lightning surge current (10/350 μ s)	50 kA
Lightning surge current (10/350)	50 kA
Remote signalling	no
Follow current quenching capacity I_{eff}	10
Maximum continuous voltage AC	255
Short-circuit resistance	10 kA
Short-circuit resistance for max. mains-side overcurrent protection	10 kA
Conductor cross-section, rigid (single-wire/multiwire), max.	50 mm ²
Conductor cross-section, rigid (single-wire/multiwire), min.	10 mm ²
Lightning protection zone LPZ	0→2
Max. mains-side overcurrent protection	500
Maximum back-up fuse	500 A
Installation type	DIN rail 35 mm
Nominal discharge current (8/20 μ s)	50 kA
Nominal discharge current (8/20 μ s) [L-N]	50 kA
Nominal voltage AC (50/60 Hz)	230 V
Network form	TN
DC network form	no
IT network form	no
Other network form	no
TN network form	yes
TN-C network form	yes
TN-C-S network form	yes
TN-S network form	yes
TT network form	yes
OBO_Nominal load current (input/output terminal)	125 A
Pole number	1
Test class, type 1	yes
Test class, type 2	yes
Protection rating	IP20
Protection level	≤1,7
Protection level [L-N]	≤1,7
Signalling on device	None
SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-1	Class I+II
Approvals	VDE
Cable type for surge protection devices	Power cable AV

Technical data sheet

Combination arrester, 1-pole

Item number: 5096849

