

Technical data sheet

Round conductor, galvanised steel with PVC jacketing

Item number: 5021162



- Can be used as an earthing conductor
- Corresponds to the requirements of VDE 0185-305 (IEC 62305)
- Zinc coating: $\geq 350 \text{ g/m}^2$ (approx. $50 \mu\text{m}$ in mean value)
- With PVC jacketing



St

Steel

FT

Hot-dip galvanised

Master data

Item number	5021162
Type	RD 10-PVC
Description 1	Round conductors
Description 2	with PVC sheathing
Manufacturer	OBO
Dimension	10mm
Colour	Black
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	75
Unit of quantity	Metre
Weight	67 kg
Weight unit	kg/100 m


Technical data sheet

Round conductor, galvanised steel with PVC jacketing

Item number: 5021162



Dimensions

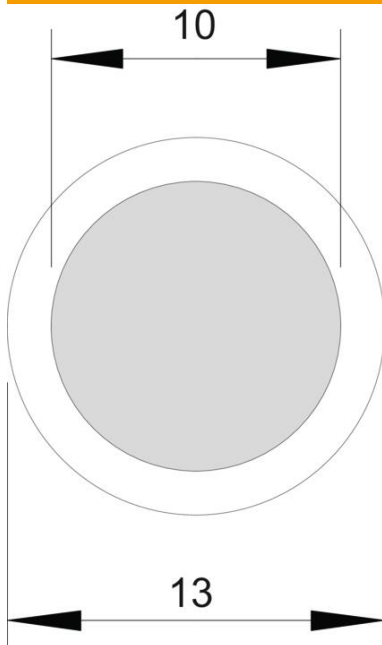

Dimension D	13 mm
Dimension d	10 mm

Technical data

Number of individual wires	1
High voltage-resistant, insulated version	no
Normal ring (ca. kg)	50
Normal ring (approx. m)	75
Length tolerance $\pm$	5 %
Cross-section	78 mm ²
Material property	Miscellaneous
Material jacket	PVC