

# Technical data sheet

## Electrogalvanised steel sleeve, with thread

Item number: 2046877



Accessory part: coupling with thread according to EN 60423 to connect electrical installation pipes and 90° bends.



|           |                   |
|-----------|-------------------|
| <b>St</b> | Steel             |
| <b>G</b>  | Electrogalvanized |

### Master data

|                                   |                            |
|-----------------------------------|----------------------------|
| Item number                       | 2046877                    |
| Type                              | SVM25W G                   |
| Description 1                     | Conduit threaded coupler   |
| Description 2                     | with thread                |
| Manufacturer                      | OBO                        |
| Dimension                         | M25x1,5                    |
| Material                          | Steel                      |
| Surface                           | Electrogalvanized          |
| Surface standard                  | EN ISO 19598 / EN ISO 4042 |
| Smallest sales unit               | 50                         |
| Unit of quantity                  | Piece                      |
| Weight                            | 5.03 kg                    |
| Weight unit                       | kg/100 pc.                 |
| CO Footprint (GWP) Cradle-to-Gate | 0,1927 kg COe / 1 Piece    |


# Technical data sheet

## Electrogalvanised steel sleeve, with thread

Item number: 2046877



### Dimensions

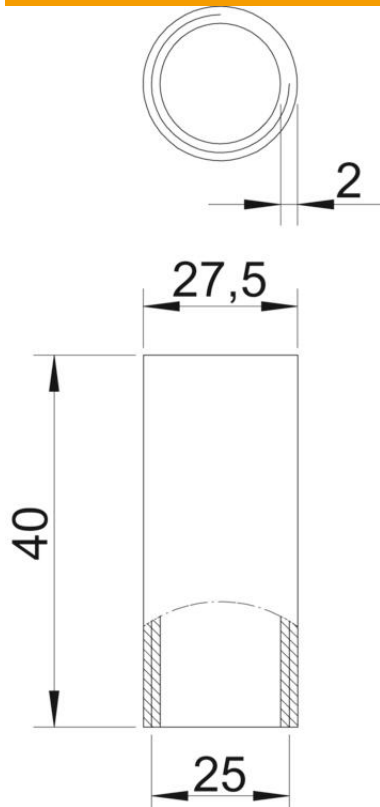

|                  |         |
|------------------|---------|
| Dimension D      | 27.5 mm |
| Dimension d      | 25 mm   |
| Dimension L      | 40 mm   |
| Dimension m (mm) | M25     |
| Dimension t      | 2 mm    |

### Technical data

|                                      |         |
|--------------------------------------|---------|
| Version for<br>for pipe diameter     | Thread  |
| Thread                               | 25 mm   |
| Size                                 | M25x1,5 |
| Halogen-free                         | 25      |
| With inspection opening and lid      | no      |
| Brushed surface                      | no      |
| Polished surface                     | no      |
| Permitted temperature range,<br>max. | 400 °C  |
| Permitted temperature range,<br>min. | -45 °C  |
| Two-part                             | no      |