

# Technical data sheet

## Chuck jaw, light-duty TKS FT

Item number: 6355828



Chuck jaw with hexagonal nut for direct fastening of structures to steel girders. The clamping range of the chuck jaw is limited to the maximum fastening thickness of 36 mm.



St

Steel

FT

Hot-dip galvanised

### Master data

|                     |                        |
|---------------------|------------------------|
| Item number         | 6355828                |
| Description 1       | Tensioning claw, light |
| Manufacturer        | OBO                    |
| Dimension           | M8x80                  |
| Colour              | zinc                   |
| Material            | Steel                  |
| Surface             | Hot-dip galvanised     |
| Surface standard    | DIN EN ISO 1461        |
| Smallest sales unit | 50                     |
| Unit of quantity    | Piece                  |
| Weight              | 16 kg                  |
| Weight unit         | kg/100 pc.             |


# Technical data sheet

## Chuck jaw, light-duty TKS FT

Item number: 6355828



### Dimensions

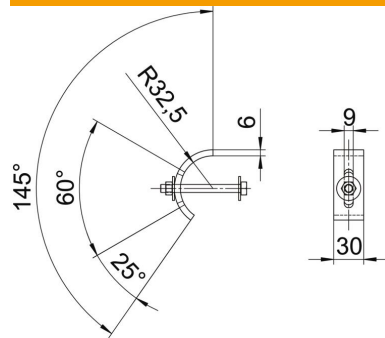

|        |       |
|--------|-------|
| Height | 36 mm |
|--------|-------|

### Technical data

|                                     |         |
|-------------------------------------|---------|
| F in kN                             | 10 kN   |
| Suitable for flange thickness, max. | 36 mm   |
| Suitable for flange thickness, min. | 16 mm   |
| Thread metric                       | 8       |
| Bolt                                | M8 x 80 |