

# Technical data sheet

Cable tie, white

Item number: 2331816



Cable ties are used for quick, uncomplicated fixing or bundling of cables and pipes to cable support systems or other mounting structures.



PA Polyamide

## Master data

|                     |                |
|---------------------|----------------|
| Item number         | 2331816        |
| Type                | 565 2.5x150 WS |
| Description 1       | Cable ties     |
| Manufacturer        | OBO            |
| Dimension           | 2,5x150mm      |
| Colour              | White          |
| Material            | Polyamide      |
| Smallest sales unit | 100            |
| Unit of quantity    | Piece          |
| Weight              | 0.047 kg       |
| Weight unit         | kg/100 pc.     |


# Technical data sheet

## Cable tie, white

Item number: 2331816



### Dimensions

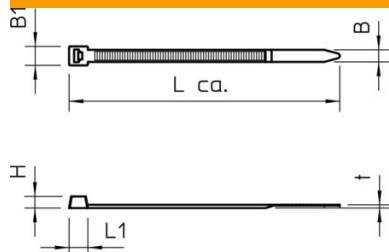

|             |        |
|-------------|--------|
| Length      | 150 mm |
| Width       | 2.5 mm |
| Height      | 1.3 mm |
| Dimension B | 2.5 mm |
| Dimension L | 150 mm |
| Dimension t | 1.3 mm |

### Technical data

|                                   |                    |
|-----------------------------------|--------------------|
| Version for                       | Externally toothed |
| Strip closure                     | Plastic tongue/tab |
| Fastening type                    | Without            |
| Labelling area                    | Without            |
| Halogen-free                      | yes                |
| Releasable lock                   | no                 |
| Max. Bundle diameter              | 39 mm              |
| ML approval                       | no                 |
| Mounting temperature, max.        | 90 °C              |
| Mounting temperature_min.         | -30 °C             |
| Reflective                        | no                 |
| Permitted temperature range, max. | 90 °C              |
| Permitted temperature range, min. | -30 °C             |
| Transparent                       | no                 |
| UL approval                       | yes                |
| UV-resistant                      | no                 |
| VG approval                       | no                 |
| Tensile strength                  | 80 N               |