


# Technical data sheet

## Multipurpose anchor

Item number: 2348128

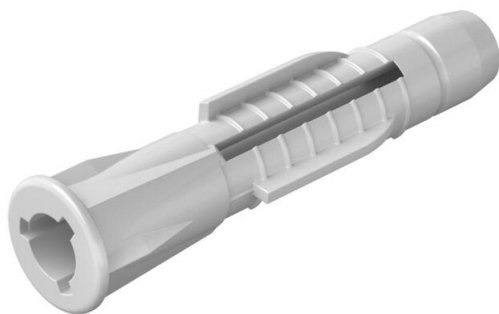

Also suitable as a cavity anchor, with collar to prevent slipping. 3 tabs take up the torque.

Required minimum screw length = anchor length + component thickness + 1 x screw Ø.

Withdrawal force applies to wood screws of the largest bolt diameter in concrete of class B25.

Our safety value recommendation: 5x




PA Polyamide

### Master data

Item number	2348128
Type	910 AZK 12x71
Description 1	All-purpose anchor
Available from	01.05.2020
Manufacturer	OBO
Dimension	12x71
Colour	Light grey
Material	Polyamide
Smallest sales unit	25
Unit of quantity	Piece
Weight	0.37 kg
Weight unit	kg/100 pc.

### Dimensions

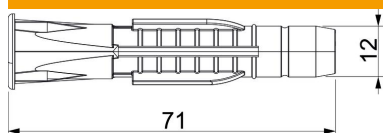

Dimension D	12 mm
Dimension L	71 mm

# Technical data sheet

## Multipurpose anchor

Item number: 2348128



### Technical data

Version for	Universal anchor
Concrete Frat	1470
Drill hole diameter, min.	12 mm
Suitable for fastening with cable ties	no
Suitable for gas concrete	no
Suitable for hexagonal wood screw	yes
Plasterboard 12.5 mm Fempf.	90
Hollow brick Hlz12 Frat	350
Wood screws	8-10
Porous calcareous sandstone KSL12 Fempf.	480
With edge	yes
With bolts	no
Porous concrete P2 Fempf.	200
Full brick Mz12 Frat	910