


# Technical data sheet

## Cross-over 85 FT

Item number: 7027437



Cross-over for the creation of a horizontal branch, fitting for lock and screw-on cable trays of side height 85 mm. Screwless mounting with double clamps or screw connection with FRS truss-head screws and M6 combination nuts. Can be used indoors and outdoors. Fastening material must be ordered separately.

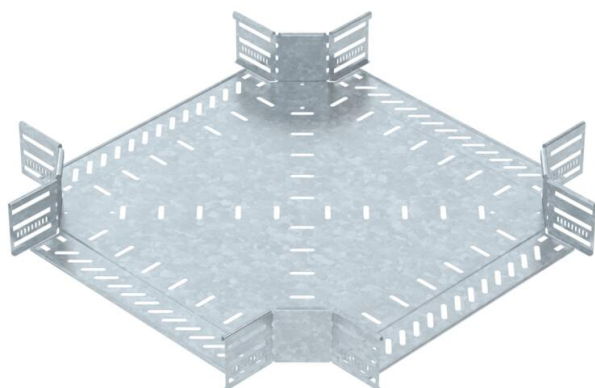

**St** Steel

**FT** Hot-dip galvanised

### Master data

|                     |                    |
|---------------------|--------------------|
| Item number         | 7027437            |
| Type                | RK 840 FT          |
| Description 1       | Cross over         |
| Description 2       | for cable tray     |
| Manufacturer        | OBO                |
| Dimension           | 85x400             |
| Material            | Steel              |
| Surface             | Hot-dip galvanised |
| Surface standard    | DIN EN ISO 1461    |
| Smallest sales unit | 1                  |
| Unit of quantity    | Piece              |
| Weight              | 339.5 kg           |
| Weight unit         | kg/100 pc.         |


# Technical data sheet

## Cross-over 85 FT

Item number: 7027437



### Dimensions

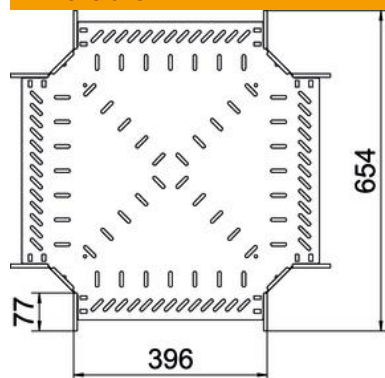

|                 |        |
|-----------------|--------|
| Width           | 400 mm |
| Height          | 85 mm  |
| Plate thickness | 1 mm   |
| Dimension B     | 400 mm |
| Dimension R     | 50 mm  |

### Technical data

|   |                      |
|---|----------------------|
| Connector version                       | Integrated connector |
| Maintain electrical functions           | no                   |
| Material thickness, floor plate         | 1 mm                 |
| NATO hole pattern                       | no                   |
| Rustproof steel, pickled                | no                   |
| Permitted temperature range, max.       | 120 °C               |
| Permitted temperature range, min.       | -20 °C               |
| Wide-span version                       | no                   |
| Type of connector, cable support system | screwed/clamped      |
| Recommended quantity of bolts           | 36 St.               |
| Rail thickness                          | 1.25 mm              |