

Technical data sheet

Industrial vertical cable ladder, 6 m W40

Item number: 6013880



Vertical ladder of side height 80 mm with screwed-in rungs.
The vertical ladder is shipped in an unmounted state.
The appropriate U clamp is type 2056W.



St Steel

FT Hot-dip galvanised

Master data

| | |
|---------------------|----------------------------|
| Item number | 6013880 |
| Type | SLS 80 W40 8 FT |
| Description 1 | Vertical ladder industrial |
| Description 2 | with W 40 rung |
| Manufacturer | OBO |
| Dimension | 800x6000 |
| Material | Steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 6 |
| Unit of quantity | Metre |
| Weight | 1536.667 kg |
| Weight unit | kg/100 m |


Technical data sheet

Industrial vertical cable ladder, 6 m W40

Item number: 6013880



Dimensions

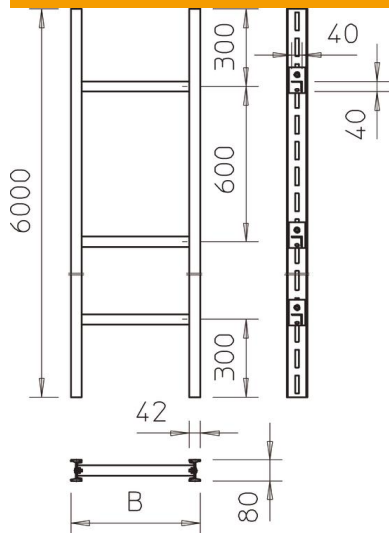

| | |
|-------------|----------|
| Length | 6,000 mm |
| Width | 800 mm |
| Height | 80 mm |
| Dimension B | 800 mm |

Technical data

| | |
|-------------------------------|----------------------|
| Side wall version | I profile |
| Version of the rungs | Profile unperforated |
| Maintain electrical functions | no |
| Rustproof steel, pickled | no |
| Side perforation | yes |
| Rung distance | 600 mm |