

Technical data sheet

Fixed earthing terminal with double thread

Item number: 5420020



- For connection to earthing systems, conductors and reinforcements
- Contact plate: Ø 80 mm made of stainless steel, rustproof (V4A)
- Double thread M10/M12
- Incl. plastic cover for simple installation



A4

Stainless steel

Master data		
Item number	5420020	
Type	205 DG V4A	
Description 1	Earthing fixed point	
Description 2	with double thread	
Manufacturer	OBO	
Dimension	M10/M12	
Material	Stainless steel	
Smallest sales unit	10	
Unit of quantity	Piece	
Weight	14.8 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	1,0155 kg CO2e / 1 Piece	


Technical data sheet

Fixed earthing terminal with double thread

Item number: 5420020



Dimensions

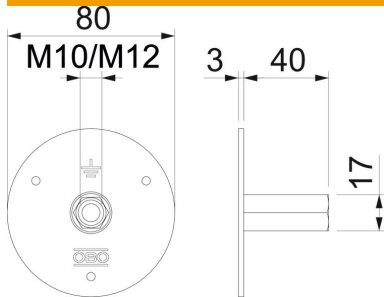

Technical data

Lightning current carrying capacity	H/100 kA
Diameter of the connection plate	80 mm
Thread	M10/M12
Short-circuit current (50 HZ)(1 s; $\leq 300^{\circ}\text{C}$)	6.2 kA
Material of the connection strap	Stainless steel, rustproof (V4A)